

400KHz 42V 2A Switching Current Boost / Buck-Boost / Inverting DC/DC Converter

**Features**

- n Wide 5V to 18V Input Voltage Range
- n Positive or Negative Output Voltage Programming with a Single Feedback Pin
- n Current Mode Control Provides Excellent Transient Response
- n 1.25V reference adjustable version
- n Fixed 400KHz Switching Frequency
- n Maximum 2A Switching Current
- n SW PIN Built in Over Voltage Protection
- n Excellent line and load regulation
- n EN PIN TTL shutdown capability
- n Internal Optimize Power MOSFET
- n High efficiency up to 90%
- n Built in Frequency Compensation
- n Built in Soft-Start Function
- n Built in Thermal Shutdown Function
- n Built in Current Limit Function
- n Available in SOIC-8 package

**General Description**

The XL6007 regulator is a wide input range, current mode, DC/DC converter which is capable of generating either positive or negative output voltages. It can be configured as either a boost, flyback, SEPIC or inverting converter. The XL6007 built in N-channel power MOSFET and fixed frequency oscillator, current-mode architecture results in stable operation over a wide range of supply and output voltages.

The XL6007 regulator is special design for portable electronic equipment.

**Applications**

- n Automotive and Industrial Boost / Buck-Boost / Inverting Converters
- n Portable Electronic Equipment



SOIC-8

Figure1. Package Type of XL6007

400KHz 42V 2A Switching Current Boost / Buck-Boost / Inverting DC/DC Converter

**Pin Configurations**

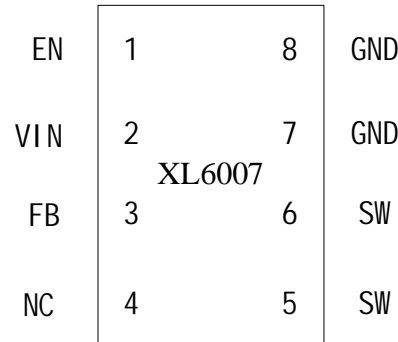


Figure2. Pin Configuration of XL6007 (Top View)

Table 1 Pin Description

| Pin Number | Pin Name | Description   |
|------------|----------|---|
| 1          | EN       | Enable Pin. Drive EN pin low to turn off the device, drive it high to turn it on. Floating is default high.   |
| 2          | VIN      | Supply Voltage Input Pin. XL6007 operates from a 5V to 18V DC voltage. Bypass Vin to GND with a suitably large capacitor to eliminate noise on the input. |
| 3          | FB       | Feedback Pin (FB). The feedback threshold voltage is 1.25V.   |
| 4          | NC       | No Connected.   |
| 5,6        | SW       | Power Switch Output Pin (SW). Output is the switch node that supplies power to the output.  |
| 7,8        | GND      | Ground Pin.   |

400KHz 42V 2A Switching Current Boost / Buck-Boost / Inverting DC/DC Converter

**Function Block**

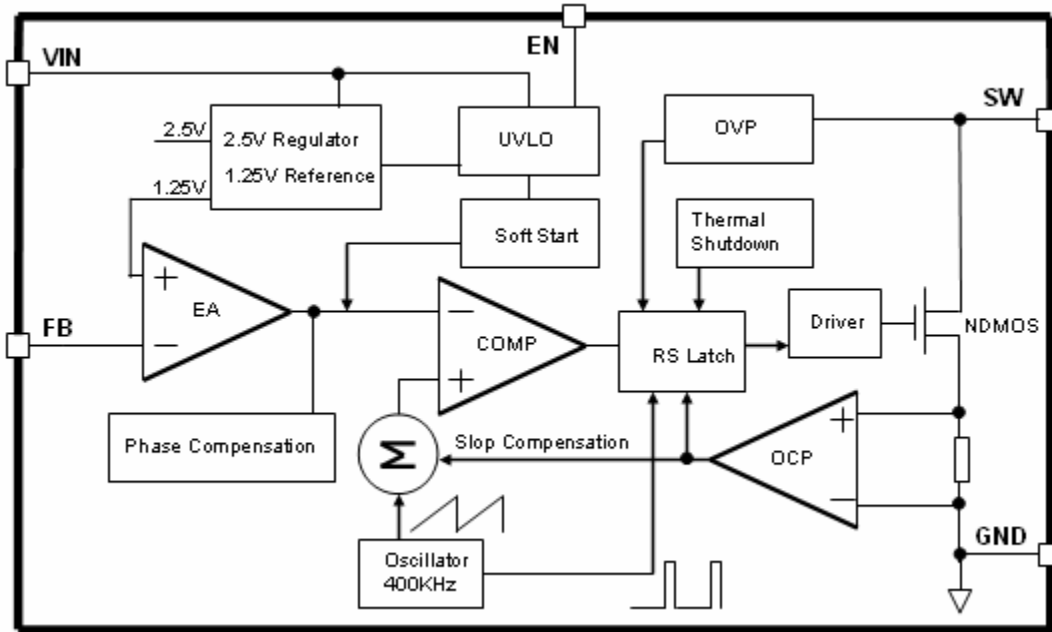


Figure3. Function Block Diagram of XL6007

**Typical Application Circuit**

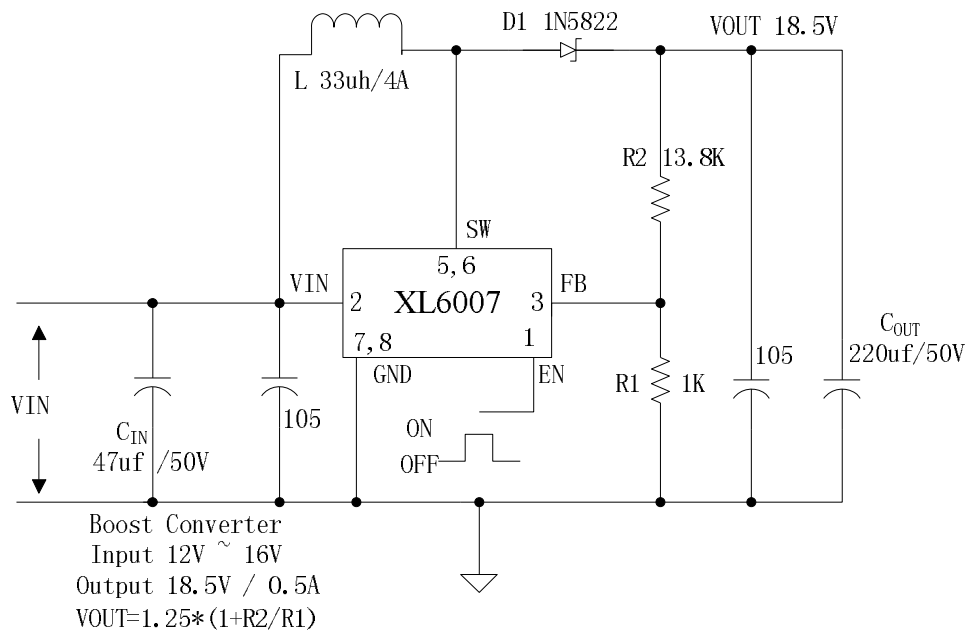


Figure4. XL6007 Typical Application Circuit (Boost Converter)

400KHz 42V 2A Switching Current Boost / Buck-Boost / Inverting DC/DC Converter

**Ordering Information**

| Package    | Temperature Range | Part Number | Marking ID | Packing Type |
|------------|-------------------|-------------|------------|--------------|
|            |                   | Lead Free   | Lead Free  |              |
|            |                   | XL6007E1    | XL6007E1   | Tube         |
| XL6007TRE1 | XL6007E1          | Tape & Reel |            |              |

XLSEMI Pb-free products, as designated with “E1” suffix in the par number, are RoHS compliant.

**Absolute Maximum Ratings (Note1)**

| Parameter   | Symbol              | Value                   | Unit |
|---|---------------------|-------------------------|------|
| Input Voltage   | V <sub>in</sub>     | -0.3 to 24              | V    |
| Feedback Pin Voltage  | V <sub>FB</sub>     | -0.3 to V <sub>in</sub> | V    |
| EN Pin Voltage  | V <sub>EN</sub>     | -0.3 to V <sub>in</sub> | V    |
| Output Switch Pin Voltage   | V <sub>Output</sub> | -0.3 to 42              | V    |
| Power Dissipation   | P <sub>D</sub>      | Internally limited      | mW   |
| Thermal Resistance (SOP-8L)<br>(Junction to Ambient, No Heatsink, Free Air) | R <sub>JA</sub>     | 100                     | °C/W |
| Operating Junction Temperature  | T <sub>J</sub>      | -40 to 125              | °C   |
| Storage Temperature   | T <sub>STG</sub>    | -65 to 150              | °C   |
| Lead Temperature (Soldering, 10 sec)  | T <sub>LEAD</sub>   | 260                     | °C   |
| ESD (HBM)   |                     | >2000                   | V    |

**Note1:** Stresses greater than those listed under Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.



400KHz 42V 2A Switching Current Boost / Buck-Boost / Inverting DC/DC Converter

**XL6007 Electrical Characteristics**

T<sub>a</sub> = 25 °C ;unless otherwise specified.

| Symbol  | Parameter        | Test Condition   | Min.  | Typ. | Max.  | Unit |
|---|------------------|--|-------|------|-------|------|
| <i>System parameters test circuit figure4</i> |                  |  |       |      |       |      |
| VFB   | Feedback Voltage | V <sub>in</sub> = 12V to 16V, V <sub>out</sub> =18V<br>I <sub>load</sub> =0.1A to 0.5A | 1.213 | 1.25 | 1.287 | V    |
| Efficiency                                    | η                | V <sub>in</sub> =12V ,V <sub>out</sub> =18.5V<br>I <sub>out</sub> =0.5A                | -     | 90   | -     | %    |

**Electrical Characteristics (DC Parameters)**

V<sub>in</sub> = 12V, GND=0V, V<sub>in</sub> & GND parallel connect a 220uf/50V capacitor; I<sub>out</sub>=0.5A, T<sub>a</sub> = 25 °C ; the others floating unless otherwise specified.

| Parameters                   | Symbol            | Test Condition   | Min. | Typ.       | Max. | Unit |
|------------------------------|-------------------|--|------|------------|------|------|
| Input operation voltage      | V <sub>in</sub>   |  | 5    |            | 18   | V    |
| Shutdown Supply Current      | I <sub>STBY</sub> | V <sub>EN</sub> =0V                                      |      | 70         | 100  | uA   |
| Quiescent Supply Current     | I <sub>q</sub>    | V <sub>EN</sub> =2V,<br>V <sub>FB</sub> =V <sub>in</sub> |      | 2.5        | 5    | mA   |
| Oscillator Frequency         | F <sub>osc</sub>  |  | 320  | 400        | 480  | Khz  |
| Switch Current Limit         | I <sub>L</sub>    | V <sub>FB</sub> =0                                       |      | 2          |      | A    |
| Output Power NMOS            | R <sub>dson</sub> | V <sub>in</sub> =12V,<br>I <sub>sw</sub> =2A             |      | 110        | 120  | mohm |
| EN Pin Threshold             | V <sub>EN</sub>   | High (Regulator ON)<br>Low (Regulator OFF)               |      | 1.4<br>0.8 |      | V    |
| EN Pin Input Leakage Current | I <sub>H</sub>    | V <sub>EN</sub> =2V (ON)                                 |      | 3          | 10   | uA   |
|                              | I <sub>L</sub>    | V <sub>EN</sub> =0V (OFF)                                |      | 3          | 10   | uA   |
| Max. Duty Cycle              | D <sub>MAX</sub>  | V <sub>FB</sub> =0V                                      |      | 90         |      | %    |

400KHz 42V 2A Switching Current Boost / Buck-Boost / Inverting DC/DC Converter

**Schottky Diode Selection Table**

| Current | Surface Mount | Through Hole | VR (The same as system maximum input voltage) |        |        |        |        |
|---------|---------------|--------------|---|--------|--------|--------|--------|
|         |               |              | 20V   | 30V    | 40V    | 50V    | 60V    |
| 1A      |               | ✓            | 1N5817  | 1N5818 | 1N5819 |        |        |
|         |               | ✓            | 1N5820  | 1N5821 | 1N5822 |        |        |
| 3A      |               | ✓            | MBR320  | MBR330 | MBR340 | MBR350 | MBR360 |
|         | ✓             |              | SK32  | SK33   | SK34   | SK35   | SK36   |
|         | ✓             |              |   | 30WQ03 | 30WQ04 | 30WQ05 |        |
|         |               | ✓            |   | 31DQ03 | 31DQ04 | 31DQ05 |        |
|         |               | ✓            | SR302   | SR303  | SR304  | SR305  | SR306  |
|         |               |              |   |        |        |        |        |

**Typical System Application – Boost (Output 18.5V/0.5A)**

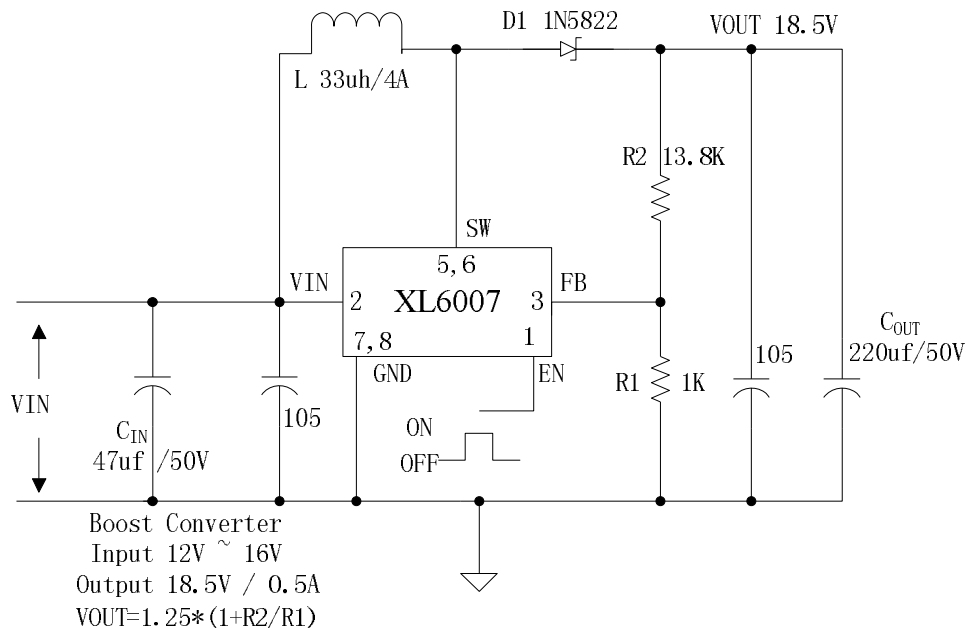


Figure5. XL6007 Typical System Application (Boost Converter)

**400KHz 42V 2A Switching Current Boost / Buck-Boost / Inverting DC/DC Converter**

**Typical System Application – SEPIC Buck-Boost (Input 10V~18V, Output 12V/0.5A)**

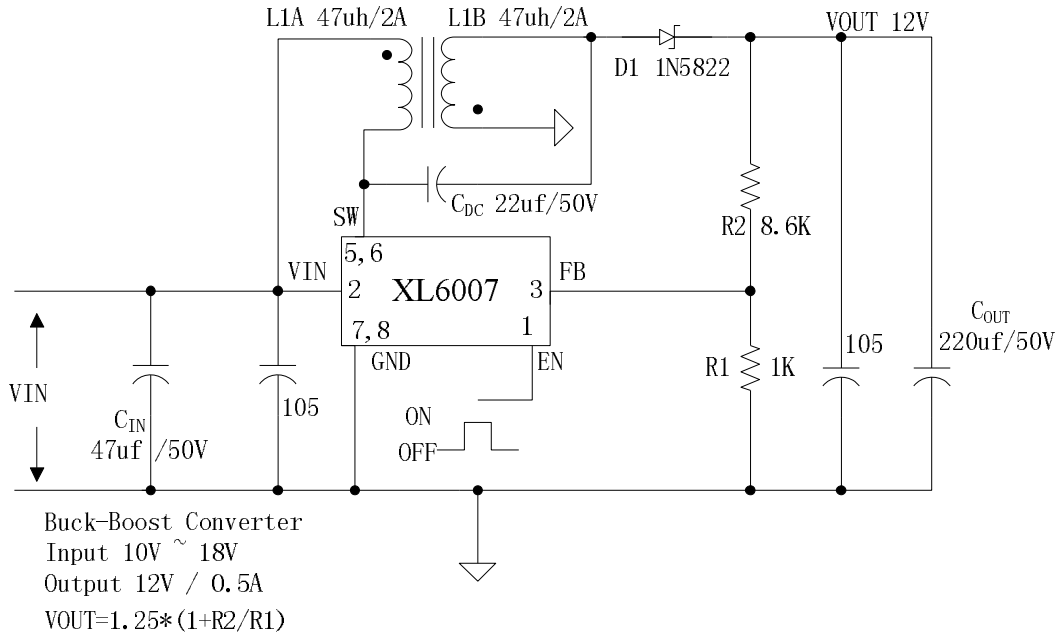


Figure6. XL6007 Typical System Application (SEPIC Buck-Boost Converter)

**Typical System Application for Inverting Converter**

**– SEPIC Inverting Topology (Input 10V~18V, Output + -12V/0.6A)**

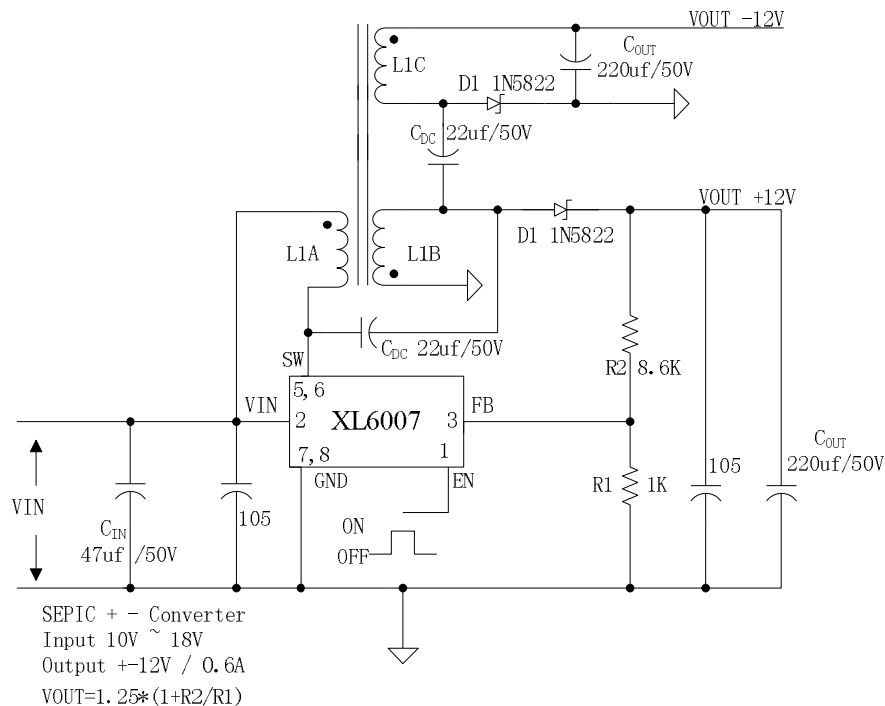


Figure7. XL6007 Typical System Application (SEPIC Inverting Converter)

400KHz 42V 2A Switching Current Boost / Buck-Boost / Inverting DC/DC Converter

**Package Information**

**SOP8 Package Mechanical Dimensions**

